


## Product Specification

PART NO.	3110801/3110802	ISSUE NO.	5
DATE OF ISSUE	5-9-2007	PAGE	8 of 10

### 7/8" low loss physical foamed insulation coaxial cable RF 50 7/8"

Description	TYPE No.	PART NO.
Standard cable	RF5078	3110801
Fire retardant cable	RF5078 Z	3110802
<b>Construction</b>		
Inner Conductor	Material	Smooth copper tube
	Diameter, mm	8.95±0.10
Insulation	Material	Physically foamed PE
	Diameter, mm	22.50±0.40
Outer conductor	Material	Ring corrugated copper
	Diameter, mm	24.90±0.30
Jacket	Material	PE or fire retardant PE
	Diameter, mm	27.30±0.20
<b>Mechanical properties</b>		
Bending radius, mm	Single	120
	Repeated	250
	Moving	500
Pulling strength, N		1470
Crush resistance, kg/mm		1.4
Recommended temperature, °C	Store	-70~+85
	Installation	-40~+60
	Operation	-55~+85
<b>Electrical properties</b>		
Impedance, Ω		50 ± 1
Capacitance, PF/m		75
Propagation velocity, %		88
DC breakdown voltage, kV		6.0
Insulation resistance, MΩ •km		>5 × 10 <sup>3</sup>
Peak power, kW		91
Screening attenuation, dB		>>120
Cut-off frequency, GHz		5.0

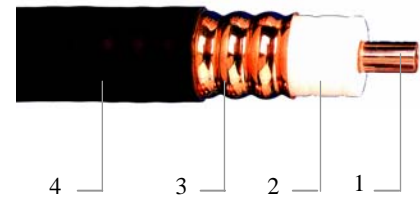

- 1: Inner Conductor      2: Insulation  
3: Outer conductor      4: Jacket

Figure 8:RF50 7/8" coaxial cable

Attenuation and average power		
Frequency MHz	Nom. attenuation @20°C, dB/100m	Power rate @20°C, kW
10	0.366	24.6
100	1.19	7.56
200	1.72	5.26
450	2.65	3.41
800	3.63	2.48
900	3.88	2.33
1000	4.12	2.19
1500	5.18	1.74
1800	5.75	1.57
2000	6.11	1.48
2500	6.95	1.30
3000	7.76	1.16
<ul style="list-style-type: none"> <li>Maximum attenuation value shall be 105% of the nominal attenuation value</li> </ul>		
VSWR		
800~1000MHz	≤1.15	
1700~2200MHz	≤1.15	
5~3000MHz	≤1.25	

#### Note:

- For fire retardant jacket, recommended temperatures are:

Store temperature	-30~+80°C
Installation temperature	-25~+60°C
Operation temperature	-30~+80°C