


## Product Specification

PART NO.	3110601 /3110602	ISSUE NO.	5
DATE OF ISSUE	5-9-2007	PAGE	6 of 10

### 1/2" low loss physical foamed insulation coaxial cable RF 50 1/2"

Description	TYPE No.	PART NO.
Standard cable	RF5012	3110601
Fire retardant cable	RF5012 Z	3110602
Construction		
Inner Conductor	Material	Copper clad aluminum wire
	Diameter, mm	4.80±0.05
Insulation	Material	Physically foamed PE
	Diameter, mm	12.20±0.30
Outer conductor	Material	Ring corrugated copper
	Diameter, mm	13.80±0.20
Jacket	Material	PE or fire retardant PE
	Diameter, mm	15.80±0.20
Mechanical properties		
Bending radius, mm	Single	70
	Repeated	125
	Moving	350
Pulling strength, N		1130
Crush resistance, kg/mm		2.0
Recommended temperature, °C	Store	-70~+85
	Installation	-40~+60
	Operation	-55~+85
Electrical properties		
Impedance, Ω		50 ± 1
Capacitance, PF/m		75.8
Propagation velocity, %		88
DC breakdown voltage, kV		4.0
Insulation resistance, MΩ •km		>5 × 10 <sup>3</sup>
Peak power, kW		40
Screening attenuation, dB		>>120
Cut-off frequency, GHz		8.8

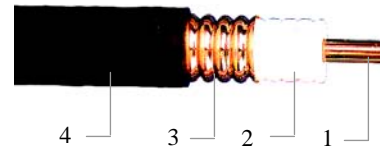

- 1: Inner Conductor      2: Insulation  
3: Outer conductor      4: Jacket

Figure 6: RF50 1/2" coaxial cable

Attenuation and average power		
Frequency MHz	Nom. attenuation @20°C, dB/100m	Power rate @20°C, kW
10	0.672	11.30
100	2.17	3.49
200	3.10	2.44
450	4.75	1.59
800	6.46	1.17
900	6.87	1.10
1000	7.28	1.04
1500	9.09	0.833
1800	10.10	0.753
2000	10.70	0.710
2500	12.10	0.627
3000	13.40	0.565
<ul style="list-style-type: none"> <li>Maximum attenuation value shall be 105% of the nominal attenuation value</li> </ul>		
VSWR		
800~1000MHz	≤ 1.15	
1700~2200MHz	≤ 1.15	
5~3000MHz	≤ 1.25	

#### Note:

- For fire retardant jacket, recommended temperatures are:

Store temperature	-30~+80°C
Installation temperature	-25~+60°C
Operation temperature	-30~+80°C